




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : G11B 7/00, 7/24		A1	(11) International Publication Number: WO 98/53448
			(43) International Publication Date: 26 November 1998 (26.11.98)
(21) International Application Number: PCT/RO98/00006 (22) International Filing Date: 20 May 1998 (20.05.98) (30) Priority Data: 97-00928 21 May 1997 (21.05.97) RO (71)(72) Applicant and Inventor: PAVEL, Eugen [RO/RO]; Calea Mosilor 274, ap. 34, R-73252 Bucuresti 2 (RO). (74) Agent: ROMINVENT S.A.; Str. Ernil Pangratti 35-1, R-71128 Bucuresti 1 (RO).		(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, GM, GW, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG). Published <i>With international search report.</i> <i>Before the expiration of the time limit for amending the</i> <i>claims and to be republished in the event of the receipt of</i> <i>amendments.</i>	

(54) Title: THREE-DIMENSIONAL OPTICAL MEMORY WITH FLUORESCENT PHOTOSENSITIVE MATERIAL

(57) Abstract

The invention relates to a WORM type (write-once-read-many) three-dimensional optical memory made by fluorescent photosensitive materials. The optical memory is based on one-photon and two-photon processes for writing and reading the digital information. Since for reading the fluorescence is used a high reading sensibility is obtained. The invention has the advantage of a novel device for storage and retrieval of the information having application in computers.

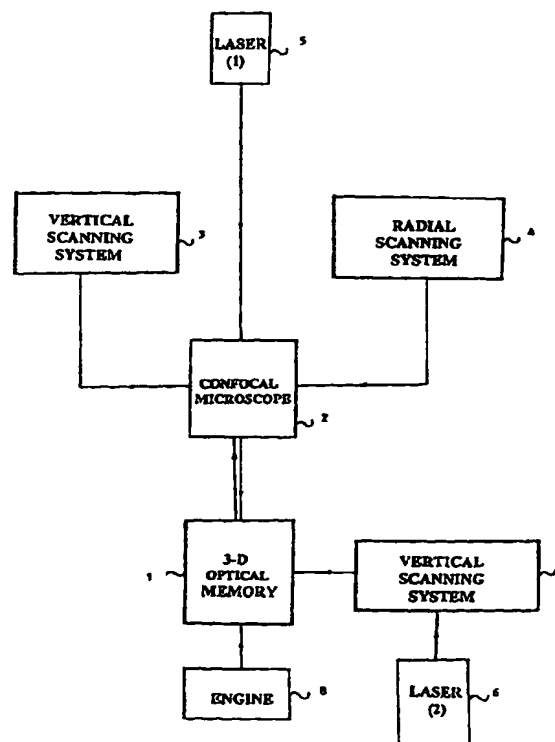

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Larvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon	KR	Republic of Korea	PL	Poland		
CN	China	KZ	Kazakhstan	PT	Portugal		
CU	Cuba	LC	Saint Lucia	RO	Romania		
CZ	Czech Republic	LI	Liechtenstein	RU	Russian Federation		
DE	Germany	LK	Sri Lanka	SD	Sudan		
DK	Denmark	LR	Liberia	SE	Sweden		
EE	Estonia			SG	Singapore		

THREE-DIMENSIONAL OPTICAL MEMORY
WITH FLUORESCENT PHOTSENSITIVE MATERIAL

5

Technical field

10 The present invention relates to a three-dimensional optical memory with fluorescent photosensitive materials and more particularly to a method and device for storage and retrieval digital data, using fluorescence phenomenon. The device presented in the invention is a WORM type storage system (write-once-read-many).

15

Background of the invention

20 It is known that the growing of computer applications has imposed the necessity for memories with huge storage capacity needed for libraries, government agencies, hospitals, etc. The new memories should have the following characteristics: low-cost, small size and low energy consumption.

25 Present memory technologies, such as semiconductor memories, CD-ROMs, rigid and flexible magnetic disks, and magnetic tape store information on a two-dimensional support. Due to their 2-D nature, these memories are not able to provide parallel access, and their access time grows with increasing capacity.

30 A solution is the use of the third dimension. Three-dimensional optical memories have higher theoretical storage capacity than present 2-D memories.

35 For example, the maximum theoretical storage density for an optical disk is $1/\lambda^2 = 3.5 \times 10^8 \text{ bits/cm}^2$, while for a 3-D memory $1/\lambda^3 = 6.5 \times 10^{12} \text{ bits/cm}^3$ assuming that the same wavelength of light $\lambda = 500 \text{ nm}$ is used to access the information. In addition, 3-D optical memory have the potential for parallel access, because an entire plane can be read or written in a single operation. 3-D data storage was experimented on holographic memories made by photorefractive materials (D. Psaltis and F. Mok, Scientific American, November 1995, p.52).

40

Summary of the invention

It is the object of the present invention to employ the fluorescence phenomenon to provide a WORM type 3-D optical memory. Since the read cycle uses fluorescence rather than changes in absorption a higher sensibility is obtained.

The invention is based on writing and reading the information in fluorescent photosensitive materials namely fluorescent photosensitive glass (Romanian Patent Application No. 97- 00005, January 6, 1997) and a fluorescent photosensitive vitroc ceramic (Romanian Patent Applications No. 97-00233, February 4, 1997 and No. 97-00761, April 21, 1997) created by the author of present invention. Writing and reading of said data are carried out with a confocal microscope. The confocal principle was invented by Marvin Minsky. A point light source is imaged in the object plane. The emitted fluorescent light is directed to a photomultiplier through a detector pinhole. The pinhole is a spatial filter, which permits the analysing of the light issued only from the focal plane containing this object. This fact ensures obtaining an improved spatial resolution. A computer displays the point as a pixel on a screen. In order to produce a complete image, the light point is moved over the entire object. The arrangement of the detector pinhole, conjugated to the illumination pinhole, ensures that only information from the focal plane reaches the detector. The confocal principle is especially valuable in fluorescence microscopy, since it almost completely eliminates stray light not coming from focal plane.

Thus the system is able to produce fluorescence images with optimum clarity and resolution of fine details. Confocal system LEICA TCS NT achieves an x-/y-resolution of 0.18μ (FWHM) and a corresponding z-resolution of better than 0.35μ (FWHM) at $\lambda = 488 \text{ nm}$ and $N.A.=1.32$. The analyzed volume of the sample is under $1 \mu\text{m}^3$. An improvement of the fluorescence microscopy has been obtained with two-photon process which is used for the excitation of fluorescent photosensitive material. The two-photon microscopy is a non-linear technique that provides intrinsic three-dimensional resolution with negligible out-of-focus photoexcitation. A similar result is obtained if the excitation beam is perpendicular to the fluorescence beam. The writing process consists of the irradiation of fluorescent photosensitive material with a radiation producing a fluorescence extinction in the irradiated areas. The reading is obtained by the excitation of material. Non-irradiated areas have a strong fluorescence. Invention presents the advantage of a novel device for storage and retrieval data having application in computers.

Disclosure of the invention

5 The invention is further illustrated by four examples which disclose the characteristic features of the invention.

The objects, features and advantages of the invention will become clear from the following description set forth below, in conjunction with the drawings, in which:

FIG. 1 is a block diagram for the writing/reading device.

10 FIG. 2 is a diagrammatic view of the confocal microscope.

Referring to FIG. 1 an optical system for recording and reading data on optical memory 1 is shown. The experimental system includes: a confocal microscope 2, vertical scanning systems 3, 7, a radial scanning system 4, a laser (1) 5, laser (2) 6 and an engine 8 used for rotation of the optical memory 1. The writing process consists in the irradiation of a selected volume of memory 1 with a light beam of the laser (1). The volume selection is carried out with said confocal microscope 2, vertical scanning system 3 and radial scanning system 4. The irradiated volume of fluorescent photosensitive material suffers a transition (at electronic level for fluorescent photosensitive glass and at structural level for fluorescent photosensitive vitrocera-
20 mic) which produces the fluorescence extinction. Two procedures could be used for reading. One of these procedures produces the excitation with one-photon process. Laser (2) and vertical scanning system 7 are used in the optical system. The second procedure, which is based on said two-photon process, directs the beam of laser (1) to the specimen.

The confocal microscope (FIG.2) used in writing processes has the following elements: two pinholes 9, 10, the lens 11, 12, 13, 15, the beam-splitter 14, the laser 5 and the detector 16.

30 The present invention will be illustrated in greater details by the following examples, but the merits thereof are not intended to be limited by the materials, compositions and procedures described in these examples.

35 Example 1 : A Ce, Eu doped fluorescent photosensitive glass is used as a support for the optical memory namely: $\text{Na}_2\text{O}-\text{P}_2\text{O}_5-0.005 \text{ CeO}_2-0.005 \text{ Eu}_2\text{O}_3$.

Memory writing is carried out with said laser (1) (XeCl laser) at $\lambda_1=308 \text{ nm}$ and the memory reading is based on said laser (2) Nd:YAG laser
40 with $\lambda_2=532 \text{ nm}$.

Example 2 : A fluorescent photosensitive glass is the support of optical memory as a variant of Example 1: $2\text{Na}_2\text{O} - (\text{Y}_{0.94}\text{Eu}_{0.05}\text{Pr}_{0.01})_2\text{O}_3 - 5\text{P}_2\text{O}_5$. The writing process uses a two-photon absorption of laser light. The recording is carried out by a tunable Ti:sapphire laser (1) at $\lambda_1 = 720 \text{ nm}$ with 100fs laser pulses. A Nd:YAG laser (2) at $\lambda_2 = 532 \text{ nm}$ excites the fluorescent material for said reading process.

Example 3 : A Tb doped fluorescent photosensitive vitroc ceramic is used for the optical memory (wt%), namely:
 $\sim 30\text{SiO}_2 - 45\text{PbF}_2 - 14\text{Al}_2\text{O}_3 - 10\text{YF}_3 - 1\text{TbF}_3 - 0.05\text{Sb}_2\text{O}_3 - 0.01\text{Ag}$
 The recording and reading are based on the two-photon processes. A tunable Ti:sapphire laser (1) with 100fs laser pulses writes at $\lambda_1 = 720 \text{ nm}$ and reads at $\lambda_2 = 750 \text{ nm}$.

Example 4 : A similar fluorescent photosensitive vitroc ceramic as in Example 3 is used for the optical memory (wt%), namely:
 $\sim 69\text{SiO}_2 - 15.3\text{Na}_2\text{O} - 5\text{ZnO} - 7\text{Al}_2\text{O}_3 - 0.25\text{Tb}_2\text{O}_3 - 0.25\text{CeO}_2 - 0.2\text{Sb}_2\text{O}_3 - 0.01\text{Ag} - 2.3\text{F} - 0.7\text{Br}$. The writing is carried out with a tunable Ti: sapphire laser (1) with 100fs laser pulses using $\lambda_1 = 720 \text{ nm}$ while for reading is used $\lambda_2 = 980 \text{ nm}$.

5 CLAIMS

- 10 1. A data storage and retrieval system characterized in that the fluorescent photosensitive materials (fluorescent photosensitive glass and fluorescent photosensitive vitrocera-
mic) are used as a support for optical memory.
- 15 2. A data storage and retrieval system as in claim 1 characterized in that it comprises:
- i) a laser (1) 5 for writing;
 - ii) a confocal microscope 2;
 - 20 iii) a vertical scanning system 3 and a radial scanning system 4 used for the movement of writing and excitation beams;
 - iv) a rotating optical memory 1;
 - v) an excitation laser (2) 6 provided with a vertical scanning system 7 for reading the optical memory by one-photon process.
- 25 3. A data storage and retrieval system according to claims 1 and 2 characterized in that the laser (1) is a pulse laser with 100fs laser pulses and uses for writing and reading the two-photon process.
- 30 4. A data storage and retrieval system according to claims 1 and 2 characterized in that the excitation beam is perpendicular on fluorescence beam in the case of one-photon process.
- 35 5. A data storage and retrieval system according to claims 1, 2, 3 and 4 characterized in that the two lasers are tunable in order to operate at a variable frequency.
- 40

1/2

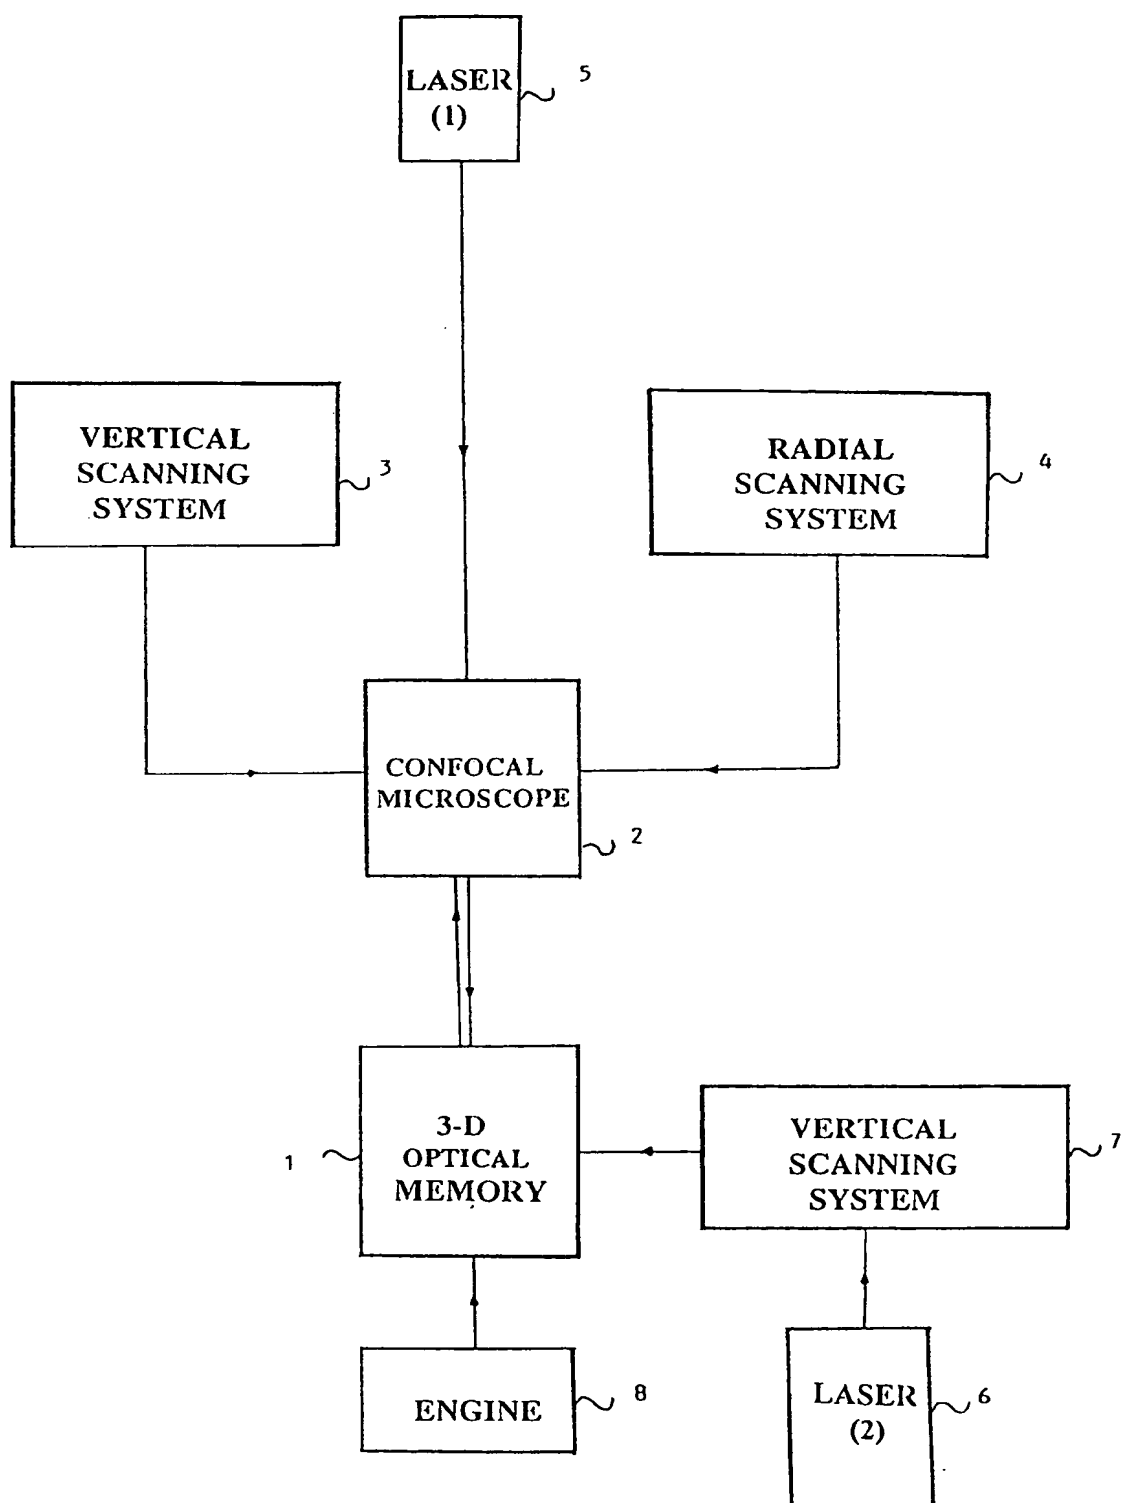


FIG. 1.

2/2

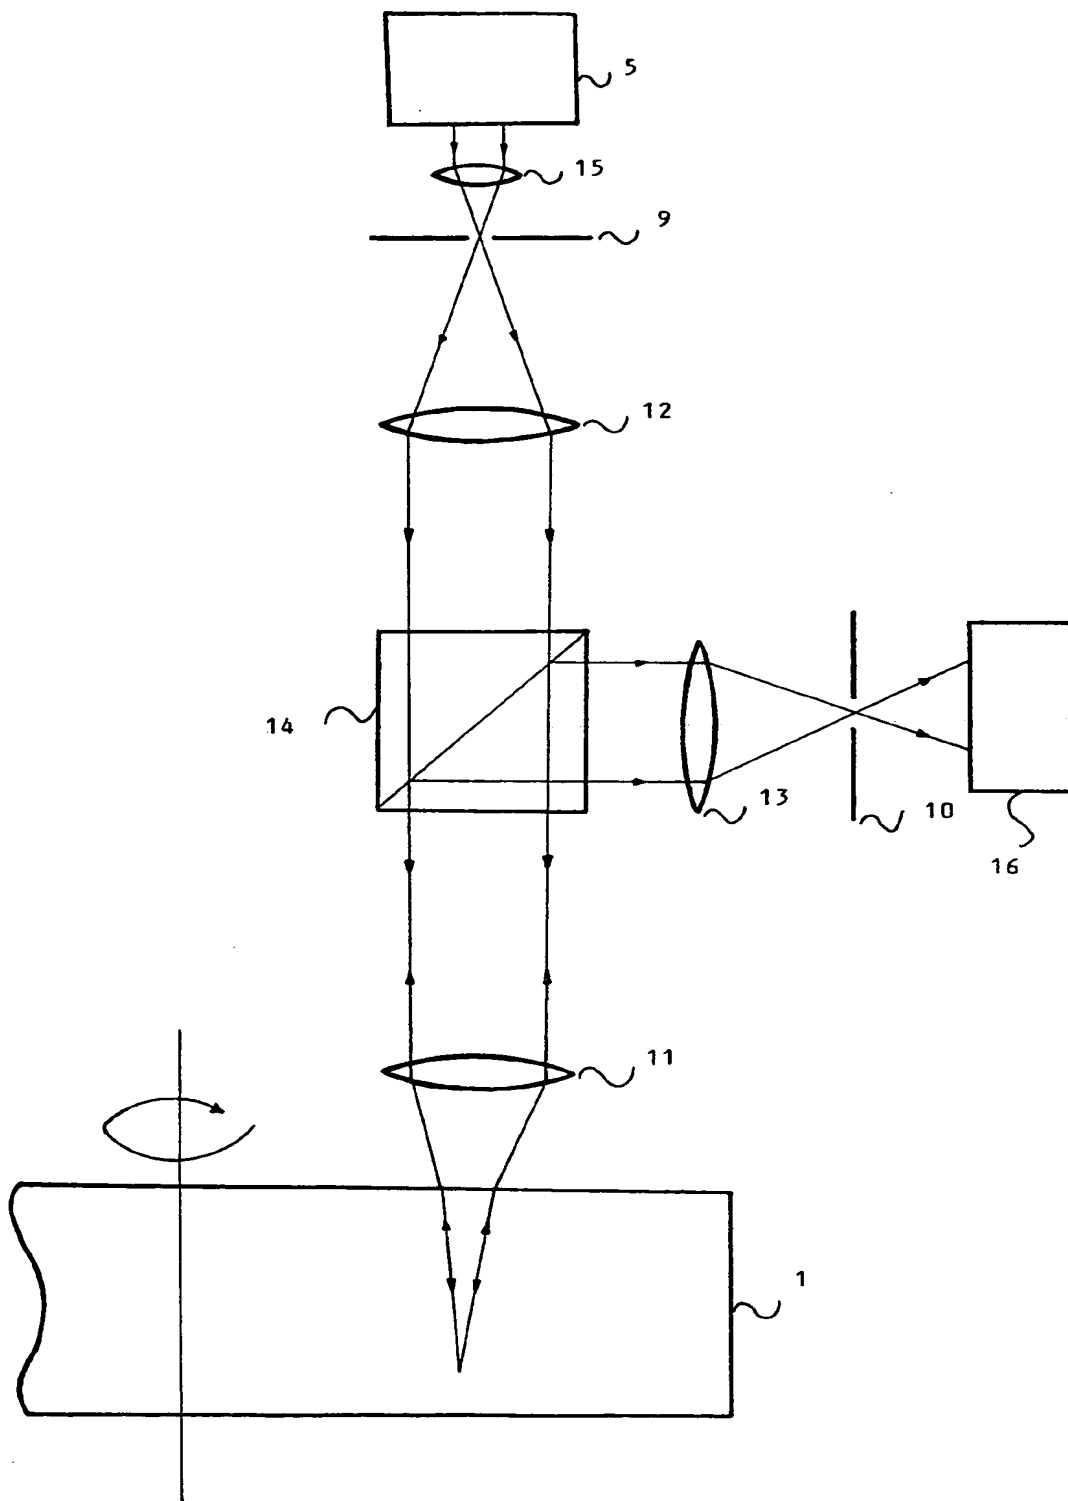


FIG. 2.

INTERNATIONAL SEARCH REPORT

International Application No.

PCT/RO 98/00006

A. CLASSIFICATION OF SUBJECT MATTER
IPC 6 G11B7/00 G11B7/24

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 G11B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 91 07651 A (CORNELL RES FOUNDATION INC) 30 May 1991 see page 5, line 28 - page 6, line 19 see page 16, line 1 - page 17, line 7; claims 7, 18	1-5
E	WO 98 25262 A (GLUSHKO BORIS ALEXY ; OMD OPTICAL MEMORY DEVICES LTD (IL); LEVICH E) 11 June 1998 see the whole document	1, 2, 4
A	US 5 325 324 A (RENTZEPIS PETER M ET AL) 28 June 1994 see the whole document	1-5

☐ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"Z" document member of the same patent family

Date of the actual completion of the international search

14 September 1998

Date of mailing of the international search report

21/09/1998

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Benfield, A

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/RO 98/00006

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 9107651 A	30-05-1991	US 5034613 A EP 0500717 A EP 0807814 A JP 5503149 T	23-07-1991 02-09-1992 19-11-1997 27-05-1993
WO 9825262 A	11-06-1998	NONE	
US 5325324 A	28-06-1994	US 5268862 A	07-12-1993

Form PCT/ISA/210 (patent family annex) (July 1992)